
# Component General, Inc.

# P/N:C98R062



# Mechanical Specifications

### Substrate Material:

Alumina Ceramic.

#### **Terminals:**

Terminal areas are nickel / tin plated which reduces oxidation thus providing a more solderable terminal.


# Temperature Range :

-55°C to + 200°C.

### Temperature Coefficient :

Standard Temperature Coefficient is -200 to -300 PPM/°C.

# Microwave Rods

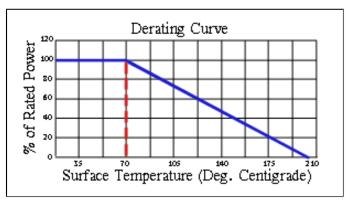

# **Electrical Specifications**

### **Resistance Value:**

10 -  $500\ \Omega$  As required. Other values avalable upon request.

# Standard Resistance Tolerance:

Standard Tolerance is  $\pm$  2% at 25 °C. Other Tolerances are available upon request.

# Nominal Power:

1/10 W.

# Frequency Range :


D.C. to 18 GHz dependent upon how the resistors are mounted and the mounting Hardware's configuration.

# Load Life :

The maximum anticipated change in resistance is 1 % when operated at listed rating for 1,000 hours.

# Part Dimensions





2445 Success Drive Odessa, FL 33556 727-376-6655 or 800-246-4084