


# Component General, Inc.

P/N: CBR-75

Stripline Base Mounted Resistors



## Mechanical Specifications

### Covers:

Alumina Ceramic.

### Substrate:

Beryllium Oxide Ceramic.

### Contact:

Beryllium Copper, Gold Plated per MIL-G-45204.

Length .125" min., Width 0.250"

Thickness 0.004" ± 0.002".

### Heat Sink:

Copper, Nickel Plated per QQ-N-290.

### Tolerance:

± 0.010" unless specified.

## Electrical Specifications

### Resistance Value:

10 - 1000 Ω or as required. Other values available upon request.


### Frequency Range:

DC - 1.5 GHz

### Standard Resistance Tolerance:

± 5% Other tolerances available upon request.

## Part Dimensions

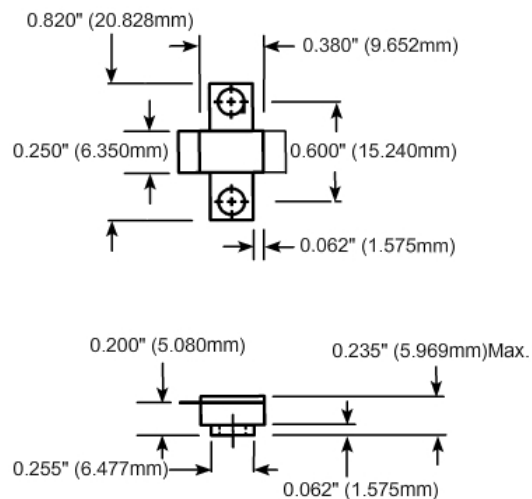

Note: The use of thermal mounting compound is recommended.