


# Component General, Inc.

P/N: CBT-150-4

Stripline Base Mounted Terminations



## Mechanical Specifications

### Covers:

Alumina Ceramic.

### Substrate:

Beryllium Oxide Ceramic.

### Contact:

Beryllium Copper, Gold Plated per MIL-G-45204.

Length: 0.125" Min., Width: 0.040", Thickness 0.004" ± 0.002".

### Heat Sink:

Copper, Nickel Plated per QQ-N-290.

### Tolerance:

± 0.010" unless specified.

## Electrical Specifications

### Resistance Value:

10 - 1000 Ω or as required.  
Other values available upon request.

### Frequency Range:

DC - 2.0 GHz




### VSWR (Max.):

1.25:1

### Standard Resistance Tolerance:

± 5% Other tolerances available upon request.

## Part Dimensions

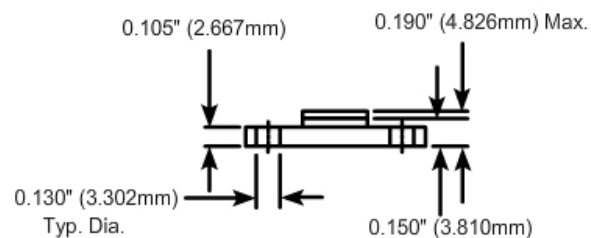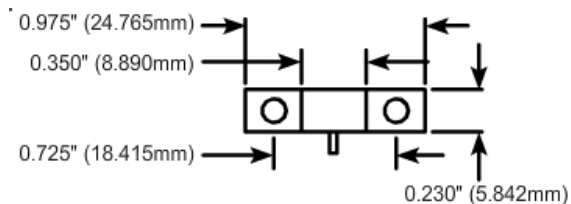

Note: The use of thermal mounting compound is recommended.