


Component General, Inc.

P/N: CBT-75

Stripline Base Mounted Terminations

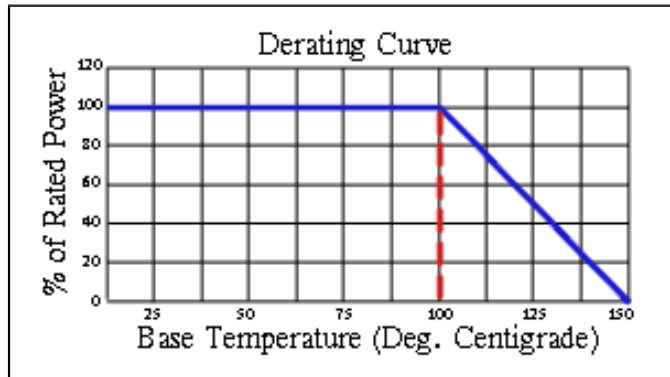

Mechanical Specifications

Covers:

Alumina Ceramic.

Substrate:

Beryllium Oxide Ceramic.

Contact:

Beryllium Copper, Gold Plated per MIL-G-45204.

Length 0.125" min., Width 0.250"


Thickness 0.004" ± 0.002".

Heat Sink:

Copper, Nickel Plated per QQ-N-290.

Tolerance:

± 0.010" unless specified.



Note: The use of thermal mounting compound is recommended.

Electrical Specifications

Resistance Value:

10 - 1000 Ω or as required.

Other values available upon request.

Frequency Range:

DC - 1.0 GHz

1.0 - 1.5 GHz

VSWR (Max.):

1.10:1

1.35:1

Standard Resistance Tolerance:

± 5% Other tolerances available upon request.

Part Dimensions

